

DTS-LED FLEXY ARM-3



DTS-LED FLEXY ARM-3 MAG





DTS-LED FLEXY ARM-3



MODELLI Model List	Codice Code	Assorbimento Total Power	Tensione d'ingresso Input voltage	Fascio luminoso Beam	Dimensioni Dimensions	Peso Weight
DTS-LED FLEXY ARM-3	3470200003	4.5 W	24 VDC	60°	Ø 70 x 674 mm	793 g
DTS-LED FLEXY ARM-3 MAG	3470200005	4.5 W	24 VDC	60°	Ø 70 x 475 mm	1520 g

Grado di protezione Protection level	ARM-3 ARM-3 MAG	IP65 IP63
Efficienza luminosa / Luminous efficiency		72 lm/W
Alimentatore / Driver		Isolato / Isolated
Temperatura superficiale Surface temperature		<60°
Durata / Lifespan		50000 h
CCT		5500-6000K
CRI		70Ra
PF		≥0.9
Modalità di montaggio Mounting method	ARM-3 ARM-3 MAG	Base fissa / Fixed base B. magnetica / Magnetic base

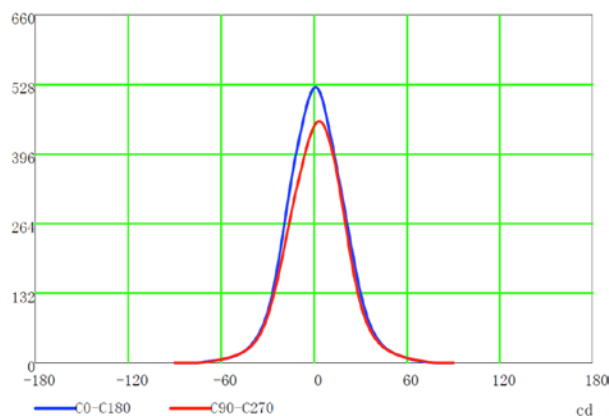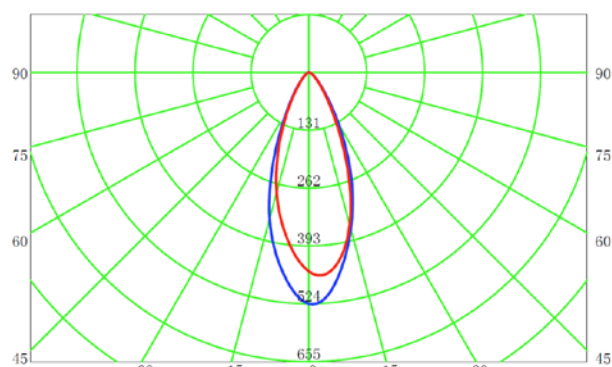

Altezza Height	Area	LUX max. / med.
1 m	Ø 0.75 m	524 305
2 m	Ø 1.50 m	131 76
3 m	Ø 2.25 m	58 34
4 m	Ø 3 m	33 19
5 m	Ø 3.75 m	21 12

