


Torrette di segnalazione acustica e luminosa

Signal tower lights

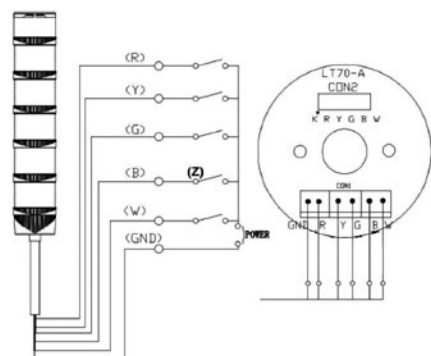

DTS-LED 30 /50 /70

Torrette di segnalazione a LED Ø 30, 50 e 70 mm
Modulari

Elevato grado di protezione (IP65)

Stato fisso/intermittente selezionabile (DTS-LED 50-70)

Stato fisso (DTS-LED 30)

Elevata luminosità fino a 18 LED per modulo

Frequenza dell'allarme 60~80 al min.

Volume modulo sonoro 70 dB ad 1 m

Supporto in policarbonato

Lente ABS

Basi in alluminio

Elevata resistenza agli agenti aggressivi

Conforme alla direttiva RoHS e alle norme

EN 60073, EN 60947.

LED signal tower lights Ø 30, 50 and 70 mm

Modular design

High IP protection (IP65)

Steady /flash light selectable (DTS-LED 50-70)

Steady light (DTS-LED 30)

High light intensity up to 18 LED each module

Buzzer frequency 60~80 min.

Up to 70 dB at 1 m



Polycarbonate base

ABS lens

Aluminum support

High resistance to aggressive agents

RoHS and EN 60073, EN 60947 compliant.

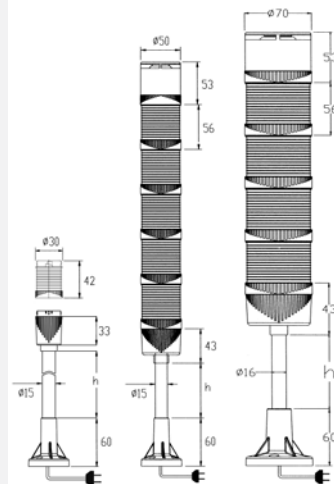

Modulo / Module		DTS-LED 30	DTS-LED 50	DTS-LED 70	Assorbimento Current draw [mA]	Intensità luminosa Luminous intensity [mcd]
		Codice Code	Codice Code	Codice Code	nominal / max	
1	sonoro / buzzer	-	347 50 8 024 5	347 70 8 024 5	15~20 / 30	-
2	sonoro alta intensità high intensity buzzer	-	-	347 70 7 024 5	150~200 / 300	-
3	● rosso - red	347 31 2 024 5	347 50 2 024 5	347 70 2 024 5	35~45 / 80	4000
4	● giallo - yellow	347 31 4 024 5	347 50 4 024 5	347 70 4 024 5		
5	● verde - green	347 31 3 024 5	347 50 3 024 5	347 70 3 024 5		
6	○ bianco - white	347 31 1 024 5	347 50 1 024 5	347 70 1 024 5		
7	● blu - blue	347 31 5 024 5	347 50 5 024 5	347 70 5 024 5		

		Codici per basi - Base codes		
DTS-LED 30		h: 10 mm	h: 100 mm	h: 250 mm
S	base S + coperchio - S base + cap	347 31 0 001 5	347 31 0 010 5	347 31 0 100 5
L	base L + coperchio - L base + cap	347 31 0 002 5	347 31 0 020 5	347 31 0 200 5
R	base R + coperchio - R base + cap	347 31 0 003 5	347 31 0 030 5	347 31 0 300 5
T	base T + coperchio - T base + cap	347 31 0 004 5	347 31 0 040 5	347 31 0 400 5
DTS-LED 50				
S	base S + coperchio - S base + cap	347 50 0 001 5	347 50 0 010 5	347 50 0 100 5
L	base L + coperchio - L base + cap	347 50 0 002 5	347 50 0 020 5	347 50 0 200 5
R	base R + coperchio - R base + cap	347 50 0 003 5	347 50 0 030 5	347 50 0 300 5
T	base T + coperchio - T base + cap	347 50 0 004 5	347 50 0 040 5	347 50 0 400 5
P	base P + coperchio - P base + cap	347 50 0 005 5	-	-
DTS-LED 70				
S	base S + coperchio - S base + cap	347 70 0 001 5	347 70 0 010 5	347 70 0 100 5
L	base L + coperchio - L base + cap	347 70 0 002 5	347 70 0 020 5	347 70 0 200 5
R	base R + coperchio - R base + cap	347 70 0 003 5	347 70 0 030 5	347 70 0 300 5
T	base T + coperchio - T base + cap	347 70 0 004 5	347 70 0 040 5	347 70 0 400 5
P	base P + coperchio - P base + cap	347 70 0 005 5	-	-