

LED Custodia cilindrica e rettangolare Cylindrical and rectangular housing



Questi LED sono incapsulati in una custodia cilindrica pronti per l'allacciamento a faston.

Una resistenza è inclusa nel contenitore pertanto il dispositivo è pronto per funzionare alla tensione prescelta.

Sono disponibili molte versioni, con colori rosso, verde, giallo, bicolore, ecc.; sono inoltre possibili esecuzioni speciali.

These LED are encapsulated in a cylindrical body ready for the faston connection.

A resistor is included therefore the device is ready to work to the chosen voltage.

Many versions are available: red, green, yellow, bicolored, etc. We can also offer special executions.

Ø	Codice Code	Tensione d'ingresso Input voltage	Assorbimento Current	Colore Colour
3	3450775241	24 V DC/AC	15 mA	●
	3450775242	24 V DC/AC	15 mA	●
	3450775243	24 V DC/AC	15 mA	●
5	3450700240	24 V DC	20 mA	● ●
	3450700244	24 V DC	20 mA	● ●
	3450700245	24 V DC	6 mA	●
	3450700249	24 V DC	20 mA	● ●
	345070024B	24 V DC	20 mA	● ●
	3450705241	24 V DC/AC	15 mA	●
	3450705242	24 V DC/AC	15 mA	●
	3450705243	24 V DC/AC	6 mA	●
	3450701101	110 V AC	6 mA	●
	3450701102	110 V AC	8 mA	●
	3450701103	110 V AC	8 mA	●
	3450701105	110 V AC	20 mA	●
	345070110B	110 V AC	6 mA	●

Ø	Codice Code	Tensione d'ingresso Input voltage	Assorbimento Current	Colore Colour
5	3450702301	230 V AC	3 mA	●
	3450702302	230 V AC	3 mA	●
	3450702303	230 V AC	3 mA	●
10	3450735241	24 V DC/AC	8 mA	●
	3450735242	24 V DC/AC	8 mA	●
	3450735243	24 V DC/AC	8 mA	●
	3450735245	24 V DC/AC	8 mA	●
	3450731101	110 V AC	8 mA	●
	3450731102	110 V AC	8 mA	●
	3450731103	110 V AC	8 mA	●
	3450731105	110 V AC	8 mA	●
	3450732301	230 V AC	3 mA	●
	3450732302	230 V AC	3 mA	●
	3450732303	230 V AC	3 mA	●

Altri modelli disponibili su richiesta. Other models available on request.



Questi LED sono incapsulati in una custodia rettangolare pronti per l'allacciamento a faston.

Una resistenza è inclusa nel contenitore pertanto il dispositivo è pronto per funzionare alla tensione prescelta.

Sono disponibili molte versioni, con colori rosso, verde, giallo, bicolore, ecc.; sono inoltre possibili esecuzioni speciali.

These LED are encapsulated in a rectangular body ready for the faston connection.

A resistor is included therefore the device is ready in order to work to the chosen voltage.

Many versions are available: red, green, yellow, bicolored, etc. We can also offer special executions.

MODELLI* - Model List*			Codice Code	Tensione d'ingresso Input voltage	Assorbimento Current	Colore Colour
S	H	P				
●			3450760241	24 V DC	8 mA	●
	●		3450760246	24 V DC	15 mA	●
		●	3450750241	24 V DC/AC	15 mA	●
		●	3450751101	110 V AC	8 mA	●
	●		3450761106	110 V AC	8 mA	●
●			3450760242	24 V DC	8 mA	●
	●		3450760247	24 V DC	15 mA	●
		●	3450750242	24 V DC/AC	15 mA	●
		●	3450751102	110 V AC	8 mA	●
	●		3450761107	110 V AC	8 mA	●
●			3450760243	24 V DC	8 mA	●
	●		3450760248	24 V DC	15 mA	●
		●	3450750243	24 V DC/AC	15 mA	●
		●	3450751103	110 V AC	8 mA	●
	●		3450761108	110 V AC	8 mA	●
			3450740244	24 V DC	15 mA	● ●
			3450741104	110 V AC	8 mA	● ●

*S = Standard con ingresso test lampada; H = Alta efficienza con ingresso test lampada; P = Con ponticello di collegamento.





*S = S standard with lamp test input; H = High efficiency with lamp test input; P = With connection jumper.

Ø 3 mm. Foro montaggio Ø 6 mm
Mounting hole Ø 6 mm

Ø 5 mm. Foro montaggio Ø 8 mm
Mounting hole Ø 8 mm

Ø 10 mm. Foro montaggio Ø 14 mm
Mounting hole Ø 14 mm

Ø 5 mm. Custodia rettangolare - Foro montaggio Ø 10 mm.
Ø 5 mm. Rectangular case - Mounting hole Ø 10 mm.

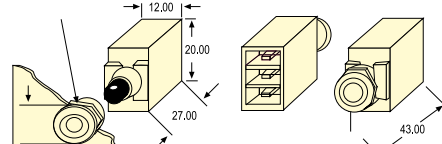

Altri modelli disponibili su richiesta. Other models available on request.