



DTS-LED LINE

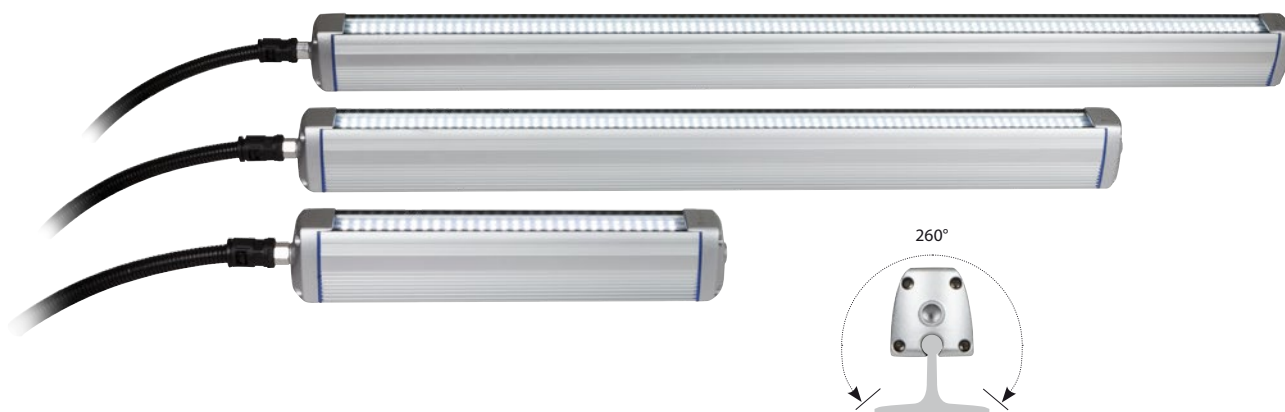

MODELLI Model List	Codice Code	Potenza Power	Tensione d'ingresso Input voltage	Flusso luminoso Luminous flux	Fascio luminoso Beam	Dimensioni Case size XYZ	Peso Weight
DTS-LED LINE 300	3470100300	7 W	24 VDC	665 lm	120°	300 x 53 x 50 mm	560 g
DTS-LED LINE 600	3470100600	18 W		1498 lm		635 x 53 x 50 mm	1070 g
DTS-LED LINE 800	3470100800	24 W		1997 lm		835 x 53 x 50 mm	1215 g


Grado di protezione / Protection level	IP65
Efficienza luminosa / Luminous efficiency	90-100 lm/W
Alimentatore / Driver	Isolato / Isolated
Temperatura superficiale Surface temperature	<60 °C
Durata / Lifespan	50000 h
CCT	5500-6000 K 4000-4500 K
CRI	80Ra
PF	≥0.9
Modalità di montaggio / Mounting method	Staffa / Clamp

Curve fotometriche / Photometric data

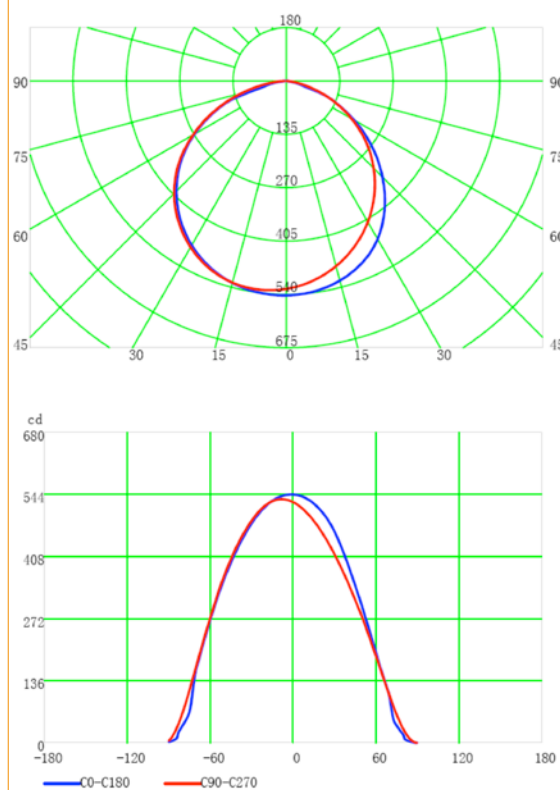

	Altezza Height	Area	LUX max. / med.	
	1 m	3x3 m	542	152
	2 m	6x6 m	135	38
	3 m	9x9 m	60	17
	4 m	12x12 m	34	9
	5 m	15x15 m	22	6

Fissaggio staffa
Clamp fixation



Lunghezza Length "L1"	Distanza delle staffe Distance of clamps "L2"
300	320-330
635	670-680
835	870-880

